



GENERAL PURPOSE

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical Transfer

Cleaning Equipment

Food Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction & Discharge
Washdown

Welding

Coupling Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements

	Page	Superior Abrasion Cover	MSHA	Non-conductive	Oil Resistance Tube*	Oil Resistance Cover*	Temp Range	Thermo-plastic	Rubber
Arctic Ortac® Plus	11				B	B	-65°F to 180°F		Yes
Braidair™	22				A	B	-20°F to 190°F		Yes
Flexsteel® Service Station Air	18				B	B	-20°F to 190°F		Yes
Gorilla®	10	Yes	Yes	Yes	A	A	-20°F to 190°F		Yes
Horizon® 200	12-13				C	C	-40°F to 190°F		Yes
Horizon® 250	12-13				C	C	-40°F to 190°F		Yes
Horizon® 300	12-13				C	C	-40°F to 190°F		Yes
Ortac® 250	14-15	Yes		Yes	A	A	-20°F to 190°F		Yes
Ortac® 300	14-15	Yes		Yes	A	A	-20°F to 190°F		Yes
Ortac® 400	14-15	Yes	Yellow only	Yes	A	A	-20°F to 190°F		Yes
Pliovic® FG (FDA-3A)	68			Yes	B	B	-10°F to 158°F	Yes	
Pliovic® GS	20-21			Yes	B	B	-10°F to 158°F	Yes	
Pliovic® Plus 250 & 300	20-21			Yes	B	B	-10°F to 158°F	Yes	
Service Station Air	19			Yes	C	C	-40°F to 190°F		Yes
Wingfoot® 200	16-17			Yes	A	B	-20°F to 190°F		Yes
Wingfoot® 300	16-17			Yes	A	B	-20°F to 190°F		Yes

*Based on RMA oil classification, see page 297 for more information.



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

Air & Multipurpose
General Purpose

Heavy Duty
Push-on

GENERAL PURPOSE

GORILLA[®]



GORILLA BY GOODYEAR



APPLICATION:

A premium-quality, multipurpose industrial hose with a wide range of applications in factories, construction, agriculture, quarries, mines, railroads, the oil and gas industry, and shipbuilding. All sizes are rated at 500 psi (3.4 Mpa) maximum working pressure. Nonconductive, minimum electrical resistance greater than one (1) megaohm per inch of hose length at 1000 Volts DC.

CONSTRUCTION

TUBE:

Nitrile synthetic rubber, RMA Class A (High Oil Resistance)

COVER:

Yellow Carbryn[®] synthetic rubber, RMA Class A (High Oil Resistance) MSHA approved

REINFORCEMENT:

Spiral Flexten[®] yarn, 2" is braided synthetic yarn

TEMPERATURE:

-20°F to 190°F (-29°C to 88°C)

PACKAGING:

3/16"-3/4"	500' reels, maximum 3 pieces, 50' increments
1"	450' reels, maximum 3 pieces, 50' increments
1 1/4"	250'-450' reels, maximum 3 pieces, 50' increments
1 1/2"	150'-350' reels, maximum 3 pieces, 50' increments
2"	200' carton, maximum 3 pieces, 50' increments

Coupled assemblies available: 1/4", 3/8", 1/2", and 3/4".

BRANDING:

Continuous brand example "Gorilla 1" (25.4 mm) 500 psi. Made in USA by Goodyear[™]. Flame Resistant USMSHA No. 2G-14C/14."

COUPLINGS:

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

NON-STOCK/SIZES:

Refer to page 300 for special production run minimum requirements.

ORDER CODES:

569-035 536-446 (2")

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
3/16	4.8	0.47	11.9	500	3.45	0.08	0.12
1/4	6.4	0.61	15.5	500	3.45	0.17	0.25
5/16	7.9	0.69	17.5	500	3.45	0.20	0.30
3/8	9.5	0.73	18.6	500	3.45	0.22	0.33
1/2	12.7	0.89	22.6	500	3.45	0.28	0.42
5/8	15.9	1.06	26.9	500	3.45	0.35	0.52
3/4	19.1	1.19	30.2	500	3.45	0.41	0.61
1	25.4	1.50	37.8	500	3.45	0.58	0.86
1 1/4	31.8	1.77	45.6	500	3.45	0.79	1.18
1 1/2	38.1	2.04	51.8	500	3.45	0.86	1.27
2	50.8	2.62	66.6	500	3.45	1.22	1.76

Chemical Transfer

Cleaning Equipment

Food Transfer Washdown

Marine

Material Handling

Abrasives Bulk Transfer Cement & Concrete

Mining

Petroleum Aircraft Fueling Dispensing Dock Transfer

Spray

Steam

Vacuum

Water Discharge Suction & Discharge Washdown

Welding

Coupling Systems

Appendix Additional Products

Chemical Charts

General Information Minimum Run Requirements




See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

GENERAL PURPOSE

ARCTIC ORTAC® PLUS

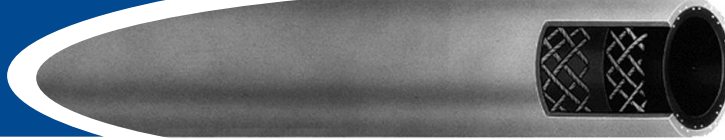

- APPLICATION:** A low-temperature hose construction for air, water, oil, kerosene, fuel oil, and some chemical operations where temperatures fall as low as -65°F (-54°C).
- CONSTRUCTION**
- TUBE:** Black low-temp, ECO oil-resistant synthetic rubber, RMA Class A (High Oil Resistance)
- COVER:** Black ultra-low temperature, ECO oil resistant synthetic rubber (with a blue stripe), RMA Class A (High Oil Resistance)
- REINFORCEMENT:** Textile one-braid synthetic yarn
- TEMPERATURE:** -65°F to 180°F (-54°C to 82°C)
- PACKAGING:** 500' reels, maximum 3 pieces, 50' minimum length
- BRANDING:** Continuous brand example "9.5mm 3/8" Arctic Ortac Plus 2.1 MPA/300 PSI Goodyear™ Made in the U.S.A."
- COUPLINGS:** Contact fitting manufacturer for proper fitting recommendation and coupling procedure.
- NON-STOCK/SIZES:** Refer to page 300 for special production run minimum requirements.
- ORDER CODES:** 536-275

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.63	16.0	300	2.07	0.16	0.22
3/8	9.5	0.75	19.1	300	2.07	0.20	0.28
1/2	12.7	0.91	23.1	300	2.07	0.27	0.37
3/4	19.1	1.18	30.0	300	2.07	0.40	0.54
1	25.4	1.50	38.1	300	2.07	0.57	0.86

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical Transfer

Cleaning Equipment

Food Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction & Discharge
Washdown

Welding

Coupling Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

Air & Multipurpose
General Purpose

Heavy Duty
Push-on

GENERAL PURPOSE

HORIZON®



APPLICATION: An economical air and water hose, Horizon is for a wide range of industrial, construction, and agricultural applications. Available in 200, 250, and 300 PSI working pressures.

CONSTRUCTION TUBE: Versigard® synthetic rubber, RMA Class C (Limited Oil Resistance)

COVER: Black, Red, Yellow, Green or Blue Versigard synthetic rubber

REINFORCEMENT: Spiral synthetic yarn, 2" is braided

TEMPERATURE: -40°F to 190°F (-40°C to 88°C)

PACKAGING:

3/16"–3/4"	500' reels, maximum 3 pieces, 50' increments
1"	450' reels, maximum 3 pieces, 50' increments
1 1/4"	400' reels, maximum 3 pieces, 50' increments
1 1/2"	300' reels, maximum 3 pieces, 50' increments
2"	200' cartons, maximum 3 pieces, 50' increments

Coupled assemblies available in 1/4", 3/8", 1/2", and 3/4" in red.

COUPLINGS: Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

BRANDING: Continuous brand example "1/2" Horizon by Goodyear™ XXX psi WP."

NON-STOCK/SIZES: Refer to page 300 for special production run minimum requirements.

ORDER CODES: See next page.

- Chemical Transfer
- Cleaning Equipment
- Food Transfer Washdown
- Marine
- Material Handling
 - Abrasives
 - Bulk Transfer
 - Cement & Concrete
- Mining
- Petroleum Aircraft Fueling
 - Dispensing
 - Dock
 - Transfer
- Spray
- Steam
- Vacuum
- Water Discharge Suction & Discharge Washdown
- Welding
- Coupling Systems
- Appendix
 - Additional Products
 - Chemical Charts
 - General Information
 - Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

GENERAL PURPOSE

HORIZON® 200

ORDER CODES: 536-035 (2" black) 536-040 (2" red) 569-009 (black)
569-011 (red) 569-038 (yellow) 569-547 (blue)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
3/16	4.8	0.44	11.2	200	1.38	0.08	0.12
1/4	6.4	0.50	12.7	200	1.38	0.09	0.13
5/16	7.9	0.58	14.7	200	1.38	0.12	0.18
3/8	9.5	0.67	17.0	200	1.38	0.15	0.22
1/2	12.7	0.81	20.6	200	1.38	0.20	0.30
5/8	15.9	0.97	24.6	200	1.38	0.27	0.40
3/4	19.1	1.12	28.5	200	1.38	0.34	0.51
1	25.4	1.44	36.8	200	1.38	0.54	0.80
1 1/4	31.8	1.73	44.0	200	1.38	0.75	1.12
1 1/2	38.1	1.98	50.3	200	1.38	0.86	1.28
2	50.8	2.50	63.5	200	1.38	1.16	1.73

HORIZON® 250

ORDER CODES: 569-010 (black) 569-012 (red) 569-039 (yellow)
569-506 (green) 569-548 (blue)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.53	13.5	250	1.72	0.11	0.16
5/16	7.9	0.59	15.0	250	1.72	0.13	0.19
3/8	9.5	0.70	17.8	250	1.72	0.17	0.25
1/2	12.7	0.84	21.3	250	1.72	0.22	0.33
5/8	15.9	0.98	24.9	250	1.72	0.27	0.40
3/4	19.1	1.14	29.0	250	1.72	0.35	0.52

HORIZON® 300

ORDER CODES: 569-516 (yellow) 569-557 (red) 569-560 (green)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.53	13.5	300	2.07	0.10	0.15
3/8	9.5	0.70	17.8	300	2.07	0.17	0.25
1/2	12.7	0.84	21.3	300	2.07	0.22	0.33
3/4	19.1	1.15	29.2	300	2.07	0.37	0.55
1	25.4	1.48	37.3	300	2.07	0.58	0.86

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical
Transfer

Cleaning
Equipment

Food
Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction & Discharge
Washdown

Welding

Coupling
Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

Air & Multipurpose
General Purpose

Heavy Duty
Push-on

GENERAL PURPOSE

ORTAC®



Chemical Transfer

Cleaning Equipment

Food Transfer
Washdown

Marine

Material Handling

Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water Discharge
Suction & Discharge
Washdown

Welding

Coupling Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements

APPLICATION:

Goodyear's Ortac® (Oil Resistant Tube and Cover) is our most popular premium-quality multipurpose hose. Used in the most abusive industrial applications, Ortac will handle air, oil, water, kerosene, and some chemicals. Nonconductive, minimum electrical resistance greater than one (1) megohm per inch of hose length; at 1000 Volts DC. Available in 250, 300 and 400 PSI working pressures. NOTE: Ortac 400 Yellow is USMSHA approved.

CONSTRUCTION

TUBE:

Nitrile synthetic rubber, RMA Class A (high oil resistance)

COVER:

Red or Yellow Carbryn® synthetic rubber, RMA Class A (high oil resistance)

REINFORCEMENT:

Spiral synthetic yarn, 2" is braided

TEMPERATURE:

-20°F to 190°F (-29°C to 88°C)

PACKAGING:

3/16"-3/4"	500' reels, maximum 3 pieces, 50' increments
1"	450' reels, maximum 3 pieces, 50' increments
1 1/4"	400' reels, maximum 3 pieces, 50' increments
1 1/2"	300' reels, maximum 3 pieces, 50' increments
2"	200', cartons, maximum 3 pieces, 50' increments

BRANDING:

Continuous brand example "1 1/2" (38.1 mm) Ortac XXX psi WP. Made in USA by Goodyear™."

COUPLINGS:

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

NON-STOCK/SIZES:

Refer to page 300 for special production run minimum requirements.

ORDER CODES:

See next page.



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

GENERAL PURPOSE

ORTAC® 250

ORDER CODES: 569-058 (1/4" - 1 1/2") red, 536-465 (2") red

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.53	13.5	250	1.72	0.09	0.13
5/16	7.9	0.69	17.5	250	1.72	0.14	0.21
3/8	9.5	0.69	17.5	250	1.72	0.15	0.22
1/2	12.7	0.84	21.3	250	1.72	0.20	0.30
5/8	15.9	1.00	25.4	250	1.72	0.26	0.39
3/4	19.1	1.14	29.0	250	1.72	0.34	0.51
1	25.4	1.47	37.3	250	1.72	0.51	0.76
1 1/4	31.8	1.77	45.2	250	1.72	0.70	1.04
1 1/2	38.1	2.08	52.8	250	1.72	0.96	1.43
2	50.8	2.50	63.5	200	1.72	1.08	1.61

ORTAC® 300

ORDER CODES: 569-059 (red)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
3/16	4.8	0.44	11.8	300	2.07	0.07	0.10
1/4	6.4	0.61	15.7	300	2.07	0.14	0.21
5/16	7.9	0.68	17.3	300	2.07	0.16	0.24
3/8	9.5	0.73	18.6	300	2.07	0.18	0.27
1/2	12.7	0.89	22.6	300	2.07	0.25	0.37
5/8	15.9	1.06	26.9	300	2.07	0.35	0.52
3/4	19.1	1.19	30.2	300	2.07	0.40	0.60
1	25.4	1.50	38.1	300	2.07	0.59	0.88
1 1/4	31.8	1.81	46.0	300	2.07	0.76	1.13
1 1/2	38.1	2.08	52.8	300	2.07	0.88	1.31

ORTAC® 400

ORDER CODES: 569-065 (yellow) (USMSHA rated) 569-066 (red)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.61	15.7	400	2.76	0.16	0.24
3/8	9.5	0.73	18.8	400	2.76	0.20	0.30
1/2	12.7	0.89	22.8	400	2.76	0.26	0.39
3/4	19.1	1.18	30.0	400	2.76	0.41	0.61
1	25.4	1.50	38.1	400	2.76	0.61	0.91

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical Transfer

Cleaning Equipment

Food Transfer Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water Discharge
Suction & Discharge
Washdown

Welding

Coupling Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.


© 2006. The Goodyear Tire & Rubber Company.

Air & Multipurpose General Purpose

Heavy Duty Push-on

GENERAL PURPOSE

WINGFOOT®

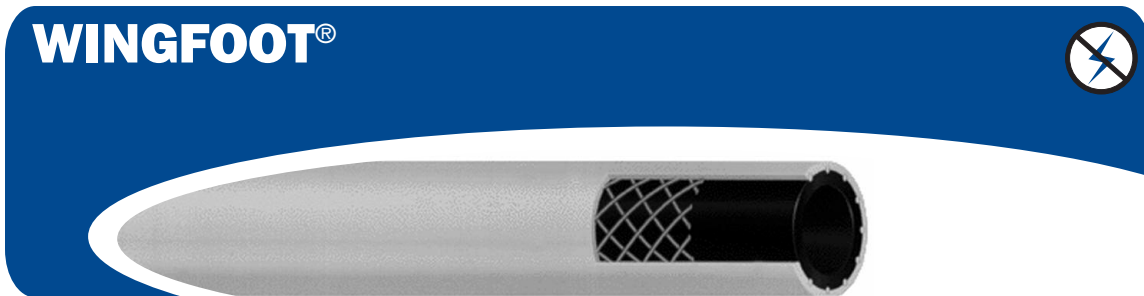

Chemical Transfer

Cleaning Equipment

Food Transfer Washdown

Marine

Material Handling

Abrasives Bulk Transfer Cement & Concrete

Mining

Petroleum Aircraft Fueling Dispensing Dock Transfer

Spray

Steam

Vacuum

Water Discharge Suction & Discharge Washdown

Welding

Coupling Systems

Appendix Additional Products Chemical Charts General Information Minimum Run Requirements

APPLICATION:

A good-quality, economical general purpose hose for industrial air service, compressor lines, pneumatic tools, low-pressure spray, and many other applications where the need for oil resistance is moderate. Nonconductive, minimum electrical resistance greater than one (1) megohm per inch of length of hose at 1000 V DC. Available in 200 and 300 PSI working pressures.

CONSTRUCTION

TUBE:

Nitrile synthetic rubber, RMA Class A (high oil resistance)

COVER:

Red, Blue, or Black Chemivic® synthetic rubber, RMA Class B (medium oil resistance)

REINFORCEMENT:

Spiral synthetic yarn

TEMPERATURE:

-20°F to 190°F (-29°C to 88°C)

PACKAGING:

3/16"–3/4"	500' reels, maximum 3 pieces, 50' increments
1"	450' reels, maximum 3 pieces, 50' increments
1 1/4"	400' reels, maximum 3 pieces, 50' increments
1 1/2"	300' reels, maximum 3 pieces, 50' increments

Coupled assemblies available in 1/4", 3/8", and 1/2" in red.

BRANDING:

Continuous brand example "Wingfoot Nonconductive 1/2" (12.7 mm) XXX psi WP. Made in USA by Goodyear™."

COUPLINGS:

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

NON-STOCK/SIZES:

Refer to page 300 for special production run minimum requirements.

ORDER CODES:

See next page.



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

GENERAL PURPOSE

WINGFOOT® 200

ORDER CODES: 569-005 (black) 569-007 (red) 569-036 (blue)

ID		NOM. OD		MAX. WP		WEIGHT	
<i>in.</i>	<i>mm.</i>	<i>in.</i>	<i>mm.</i>	<i>psi.</i>	<i>Mpa.</i>	<i>lb./ft.</i>	<i>kg./m.</i>
3/16	4.8	0.44	11.2	200	1.38	0.07	0.10
1/4	6.4	0.53	13.5	200	1.38	0.10	0.15
5/16	7.9	0.63	16.0	200	1.38	0.14	0.21
3/8	9.5	0.69	17.5	200	1.38	0.15	0.22
1/2	12.7	0.84	21.3	200	1.38	0.21	0.31
5/8	15.9	1.00	25.4	200	1.38	0.27	0.40
3/4	19.1	1.13	28.7	200	1.38	0.38	0.57
1	25.4	1.47	37.3	200	1.38	0.58	0.86

WINGFOOT® 300

ORDER CODES: 569-006 (black) 569-008 (red) 569-037 (blue)

ID		NOM. OD		MAX. WP		WEIGHT	
<i>in.</i>	<i>mm.</i>	<i>in.</i>	<i>mm.</i>	<i>psi.</i>	<i>Mpa.</i>	<i>lb./ft.</i>	<i>kg./m.</i>
1/4	6.4	0.54	13.7	300	2.07	0.14	0.21
5/16	7.9	0.64	16.3	300	2.07	0.18	0.27
3/8	9.5	0.69	17.5	300	2.07	0.19	0.28
1/2	12.7	0.86	21.8	300	2.07	0.26	0.39
5/8	15.9	1.02	25.9	300	2.07	0.33	0.49
3/4	19.1	1.19	30.2	300	2.07	0.42	0.63
1	25.4	1.50	38.1	300	2.07	0.62	0.92
1 ^{1/4}	31.8	1.77	45.6	250	1.72	0.84	1.25
1 ^{1/2}	38.1	2.08	53.2	250	1.72	1.04	1.55

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical Transfer

Cleaning Equipment

Food Transfer Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water Discharge Suction & Discharge Washdown

Welding

Coupling Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.


© 2006. The Goodyear Tire & Rubber Company.

Air & Multipurpose
General Purpose

Heavy Duty
Push-on

GENERAL PURPOSE

FLEXSTEEL® SERVICE STATION AIR

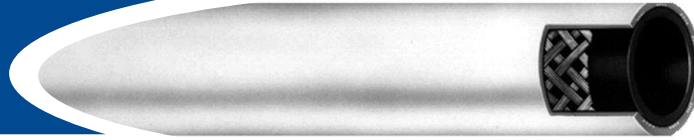

APPLICATION:

A good-quality, economical general purpose hose for industrial air service, compressor lines, pneumatic tools, low-pressure spray, and many other applications where the need for oil resistance is moderate. Nonconductive, minimum electrical resistance greater than one (1) megohm per inch of length of hose at 1000 V DC.

CONSTRUCTION

TUBE:

Nitrile synthetic rubber, RMA Class A (High Oil Resistance)

COVER:

Red, Blue or Black Chemivic® synthetic rubber, RMA Class B (medium/high oil resistance)

REINFORCEMENT:

Spiral synthetic yarn

TEMPERATURE:

-20°F to 190°F (-29°C to 88°C)

PACKAGING:

3/16"-3/4"	500' reels, maximum 3 pieces, 50' increments
1"	450' reels, maximum 3 pieces, 50' increments
1 1/4"	400' reels, maximum 3 pieces, 50' increments
1 1/2"	300' reels, maximum 3 pieces, 50' increments

Coupled assemblies available in 1/4", 3/8", and 1/2" in red.

BRANDING:

Continuous brand example "Wingfoot Nonconductive 1 1/2" (38.1mm) 300 psi WP. Made in USA by Goodyear™."

COUPLINGS:

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

ORDER CODES:

569-008 (red) 536-037 (1 1/4"-1 1/2")
569-037 (blue)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.61	15.5	250	1.72	0.18	0.28
3/8	9.5	0.72	18.3	250	1.72	0.23	0.34

- Chemical Transfer
- Cleaning Equipment
- Food Transfer Washdown
- Marine
- Material Handling
 - Abrasives
 - Bulk Transfer
 - Cement & Concrete
- Mining
- Petroleum
 - Aircraft Fueling
 - Dispensing
 - Dock
 - Transfer
- Spray
- Steam
- Vacuum
- Water
 - Discharge
 - Suction & Discharge
 - Washdown
- Welding
- Coupling Systems
- Appendix
 - Additional Products
 - Chemical Charts
 - General Information
 - Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

GENERAL PURPOSE

SERVICE STATION AIR



APPLICATION: For tire inflation service from towers, reels, or curb connections.

CONSTRUCTION

TUBE: Nitrile synthetic rubber, RMA Class B (Medium Oil Resistance)

COVER: Red or Black nitrile synthetic rubber, abrasion- and oil-resistant, RMA Class B (Medium Oil Resistance)

REINFORCEMENT: Braided (1) steel wire braid

TEMPERATURE: -20°F to 190°F (-29°C to 88°C)

PACKAGING: 500' reels, maximum 3 pieces, 25' minimum

BRANDING: Continuous brand example "Goodyear™ 1/4" Flexsteel Service Station Air. Made in USA."

COUPLINGS: Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

NON-STOCK/SIZES: Refer to page 300 for special production run minimum requirements.

ORDER CODES: 539-078 (red) 539-097 (black)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.59	15.0	250	1.72	0.16	0.24
3/8	9.5	0.71	18.0	250	1.72	0.21	0.31

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical Transfer

Cleaning Equipment

Food Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction & Discharge
Washdown

Welding

Coupling Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

Air & Multipurpose
General Purpose

Heavy Duty
Push-on

GENERAL PURPOSE



APPLICATION:

A lightweight, economical general purpose hose for carrying air, water, and many spray solutions. Pliovic is suitable for a wide range of industrial, construction, agricultural hand sprayers, and many multipurpose applications. Nonconductive, minimum electrical resistance greater than one (1) megohm per inch of hose length at 1000 Volts DC. Available in Pliovic GS construction or a thick cover, Pliovic Plus construction.

CONSTRUCTION

TUBE:

Black Pliovic, RMA Class B (Medium Oil Resistance)

COVER:

Pliovic, smooth finish, RMA Class B (Medium Oil Resistance)

REINFORCEMENT:

Spiral synthetic yarn

TEMPERATURE:

-10°F to 158°F (-23°C to 70°C)

PACKAGING:

1/4"-1/2"	750' reels, maximum 3 pieces, 50' increments
5/8"	500' reels, maximum 3 pieces, 50' increments
3/4"	450' reels, maximum 3 pieces, 50' increments
1"	400' reels, maximum 3 pieces, 50' increments

Coupled assemblies available upon request. Contact hose marketing for availability on cut, coiled, and tied hose lengths.

BRANDING:

Continuous brand example "Pliovic GS 3/8" ID (9.5 mm) XXX psi WP. Made in USA by Goodyear™."

COUPLINGS:

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

NON-STOCK/SIZES:

Refer to page 300 for special production run minimum requirements.

ORDER CODES:

See next page.

- Chemical Transfer
- Cleaning Equipment
- Food Transfer Washdown
- Marine
- Material Handling
 - Abrasives
 - Bulk Transfer
 - Cement & Concrete
- Mining
- Petroleum
 - Aircraft Fueling
 - Dispensing
 - Dock
 - Transfer
- Spray
- Steam
- Vacuum
- Water
 - Discharge
 - Suction & Discharge
 - Washdown
- Welding
- Coupling Systems
- Appendix
 - Additional Products
 - Chemical Charts
 - General Information
 - Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

GENERAL PURPOSE

PLIOVIC® GS

ORDER CODES: 540-350 (blue) 540-357 (yellow) 540-472 (black)
540-358 (green) 540-406 (red)

ID		NOM. OD		MAX. WP		WEIGHT	
<i>in.</i>	<i>mm.</i>	<i>in.</i>	<i>mm.</i>	<i>psi.</i>	<i>Mpa.</i>	<i>lb./ft.</i>	<i>kg./m.</i>
1/4	6.4	0.45	11.4	300	2.07	0.06	0.09
5/16	7.9	0.59	15.0	300	2.07	0.11	0.16
3/8	9.5	0.60	15.2	300	2.07	0.09	0.13
1/2	12.7	0.78	19.8	300	2.07	0.15	0.22

PLIOVIC® PLUS 250 (THICK COVER)

ORDER CODES: 540-201 (red) 540-227 (blue) 540-232 (green)
540-233 (black) 540-257 (yellow)

ID		NOM. OD		MAX. WP		WEIGHT	
<i>in.</i>	<i>mm.</i>	<i>in.</i>	<i>mm.</i>	<i>psi.</i>	<i>Mpa.</i>	<i>lb./ft.</i>	<i>kg./m.</i>
1/4	6.4	0.50	12.7	250	1.72	0.08	0.12
3/8	9.5	0.66	16.8	250	1.72	0.13	0.19
1/2	12.7	0.81	20.6	250	1.72	0.17	0.25
5/8	15.9	0.94	23.9	250	1.72	0.20	0.30
3/4	19.1	1.11	28.2	250	1.72	0.28	0.42
1	25.4	1.38	35.1	200	1.38	0.37	0.55

PLIOVIC® PLUS 300 (THICK COVER)

ORDER CODES: 540-279 (red) 540-280 (blue)
Other colors available upon request.

ID		NOM. OD		MAX. WP		WEIGHT	
<i>in.</i>	<i>mm.</i>	<i>in.</i>	<i>mm.</i>	<i>psi.</i>	<i>Mpa.</i>	<i>lb./ft.</i>	<i>kg./m.</i>
1/4	6.4	0.50	12.7	300	2.07	0.08	0.12
3/8	9.5	0.66	16.8	300	2.07	0.13	0.19
1/2	12.7	0.81	20.6	300	2.07	0.17	0.25

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical
Transfer

Cleaning
Equipment

Food
Transfer
Washdown

Marine

Material Handling

Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction & Discharge
Washdown

Welding

Coupling
Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.


© 2006. The Goodyear Tire & Rubber Company.

Air &
Multipurpose
General Purpose

Heavy Duty
Push-on

GENERAL PURPOSE

BRAIDAIR™

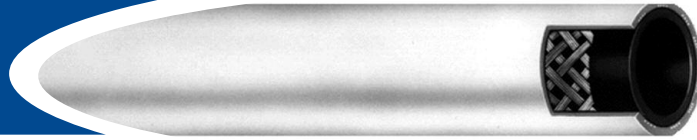

APPLICATION:

A quality braided general purpose hose for industrial service, compressor lines, pneumatic tools, water service, and low-pressure spray where the need for oil resistance is moderate.

CONSTRUCTION

TUBE:

Black synthetic, RMA Class A (High Oil Resistance)

COVER:

Red synthetic, RMA Class B (Medium Oil Resistance)

REINFORCEMENT:

Braided (1) synthetic yarn

TEMPERATURE:

-20°F to 190°F (-29°C to 88°C)

PACKAGING:

1/4"–1"	400'–750' reels, maximum 3 pieces, 50' minimum
1 1/4"–1 1/2"	300' reels, maximum 3 pieces, 50' minimum
2"	150'–250' carton, maximum 2 pieces, 50' minimum

BRANDING:

Continuous Brand Example "Goodyear™ Braidair 300 psi WP (20 Bar) 3/8" (9.5mm)."

COUPLINGS:

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

NON-STOCK/SIZES:

Refer to page 300 for special production run minimum requirements.

ORDER CODES:

536-422 (1/2" - 1 1/2") 536-421 (2")

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.55	14.0	300	2.07	0.11	0.16
3/8	9.5	0.72	18.3	300	2.07	0.18	0.26
1/2	12.7	0.85	21.6	300	2.07	0.21	0.31
3/4	19.1	1.13	28.7	300	2.07	0.32	0.48
1	25.4	1.47	37.3	300	2.07	0.50	0.74
1 1/4	31.8	1.80	45.7	300	2.07	0.75	1.12
1 1/2	38.1	2.09	53.1	300	2.07	1.00	1.49
2	50.8	2.50	63.5	200	1.38	1.09	1.62

- Chemical Transfer
- Cleaning Equipment
- Food Transfer Washdown
- Marine
- Material Handling
 - Abrasives
 - Bulk Transfer
 - Cement & Concrete
- Mining
- Petroleum
 - Aircraft Fueling
 - Dispensing
 - Dock Transfer
- Spray
- Steam
- Vacuum
- Water
 - Discharge
 - Suction & Discharge
 - Washdown
- Welding
- Coupling Systems
- Appendix
 - Additional Products
 - Chemical Charts
 - General Information
 - Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.